

### Features of the power supply unit:

- The output voltage range 44-57VDC
- Power from PoE switch
- The PoE IN input compliant with the IEEE 802.3af standard
- The PoE OUT1/2 output compliant with the IEEE 802.3af standard
- Increases Ethernet and PoE power range by 100 meters
- designed for 10Mbit/s and 100Mbit/s network
- LED optical signalization
- protections:
  - surge protection (PoE input)
  - OLP overload protection
  - SCP short circuit protection
- warranty – 2 year from the production date

## 1. Technical description.

### 1.1. General description.

The **EXT-POE2 extender** is a device designed to increase the PoE and Ethernet range by additional 100 meters using UTP Cat. 5/5e cable. The Extender can be powered using a PoE switch or another PoE-compliant device (PoE IN input). The output voltage and data are available at the PoE OUT1 and OUT2 outputs designed for connecting cameras or other IP devices using PoE power supply. The maximum load current is 0,4A (0,3A/port). The PoE OUT1 and PoE OUT2 ports are supplied over 4/5 (+) and 7/8 (-) pairs, which, according to the Ethernet standard, are not used for data transmission (data transmission uses 1/2 and 3/6 twisted pairs).

### 1.2. Technical parameters.

Tabla 1. Technical parameters

Supply voltage	compliant with 802.3af/at (44÷57VDC)
Current consumption by PSU systems	<30mA
Module power	20W max.
Output voltage	compliant with 802.3af
Output current	0,3A/ports ( $\Sigma=0,4A$ max.)
The PoE IN input power supply pairs	1/2 (+) 3/6(-) 4/5 (+) 7/8 (-)
The PoE OUT1/2 output power supply pairs	4/5 (+) 7/8 (-)
Overload protection OLP Short circuit protection SCP	105% ÷ 150% of nominal output current, automatic recovery
LED operation indication	Yellow <b>LAN</b> LED - indicating the LAN connection status Green <b>PoE</b> LED - presence of input/output voltage
Operation conditions	II environmental class, -10°C÷40°C
Dimensions (LxWxH)	81 x 77 x 26 [+/- 2mm]
Mounting	mounting screws x2 (holes Ø 6mm)
Connectors: - IN/OUT PoE	RJ45 8P8C
Net/gross weight	0,11kg / 0,15kg
Storage temperature	-20°C...+60°C
Declarations, warranty	CE, RoHS, 2 years from the production date

Table 2. Description of components and connectors.

Element no. [fig. 1]	Description
[1]	The PoE IN-input port
[2]	LED LAN (yellow)
[3]	LED PoE (green)
[4]	PoE OUT 1/2 - Output ports

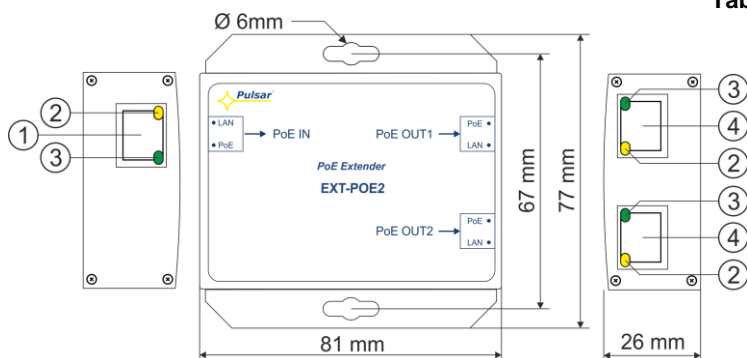


Fig.1. A schematic drawing of the device.

Connection schemes:



Connection of two IP PoE cameras and extension of the range for another 100m

## 2. Installation.

### 2.1. Requirements.

The extender should be mounted by a qualified installer, holding relevant permits and licenses (applicable and required for a given country) for low-voltage installations. The device shall be mounted in confined spaces (in accordance with the 2nd environmental class) with normal air humidity (RH=90% max. without condensation) and the temperature from -10°C to +40°C.

The device is designed for a 10Mbit/s or 100Mbit/s Ethernet network (the so-called Fast Ethernet). **However, it cannot be used in 1Gbit/s networks (the so-called Gigabit Ethernet).** The minimum category cable recommended to connect the extender and the network device is UTP Cat. 5 cable.

### 2.2. Installation procedure.

Connect the network cables (Ethernet) to the RJ45 connectors marked PoE IN and PoE OUT. Connect the network cables (Ethernet + Power) from PoE Switch to PoE-IN RJ45 connector, taking into account current efficiency. Connect devices, such as IP cameras, to the PoE OUT 1/2 outputs e.g. IP cameras.

## 3. Maintenance.

Any and all maintenance operations may be performed following the disconnection of the power supply from the power network. The power supply does not require any specific maintenance procedures, however, in the case of significant level of dust, it should be cleaned with compressed air.



### WEEE MARK

**According to the EU WEE Directive – It is required not to dispose of electric or electronic waste as unsorted municipal waste and to collect such WEEE separately.**

### Pulsar

Siedlec 150, 32-744 Łapczyca, Poland  
Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50  
e-mail: [biuro@pulsar.pl](mailto:biuro@pulsar.pl), [sales@pulsar.pl](mailto:sales@pulsar.pl)  
http:// [www.pulsar.pl](http://www.pulsar.pl), [www.zasilacze.pl](http://www.zasilacze.pl)