
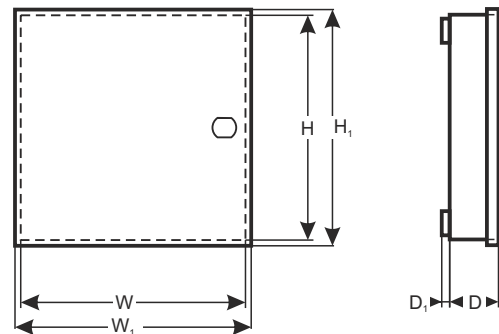


CODE: **AWO602** v.1.0/I  
 NAME: **Nedap Power 4M**

EN

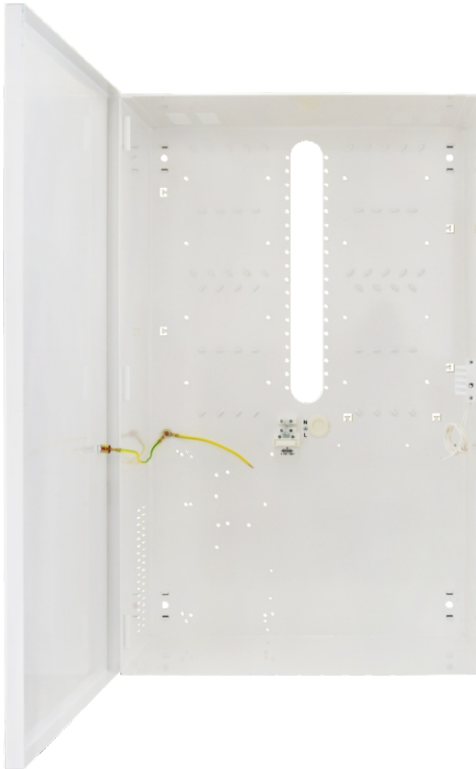

## DESTINATION

### Nedap modules:

9981624 AP7803m – Access Control Controller (AEpu)  
 9981632 AP7003m – Access control expansion module (AEpack)  
 9984135 AP7031m – I/O module (AEpack)

### Power supply units:

PSC-60A-C\*, PSC-100A-C\*, PSC-60B-C\*, PSC-100B-C\*  
 SCP-35-12, SCP-50-12, SCP-75-12, SCP-35-24, SCP-50-24, SCP-75-24  
 AD-55A, AD-155A, AD-55B, AD-155B  
 RS-75-12 (LRS-75-12)  
 PSB-12V2A, PSB-12V3A, PSB-12V5A, PSB-12V7A, PSB-12V10A, PSB-24V2A, PSB-24V3A, PSB-24V5A  
 PSG2-12V2A, PSG2-12V3A, PSG2-12V5A, PSG2-12V7A, PSG2-24V2A, PSG2-24V3A

\*PKAZ041 – required to connect power supply.

## TECHNICAL DATA

<b>External dimensions of the enclosure:</b>	W=340, H=550, D+D <sub>1</sub> =170+14 [+/-2 mm]
<b>External dimensions of the front panel:</b>	W <sub>1</sub> =345, H <sub>1</sub> =555 [+/-2 mm]
<b>Battery space:</b>	2x17/18Ah / 12 V Sealed Lead Acid (SLA)
<b>Weight net/gross:</b>	7,0 / 7,582 [kg]
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
<b>Closing:</b>	screwed: screw x 1, at the front
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 14mm
<b>Declaration, warranty:</b>	CE, 2 year from the production date