



**INSTALLATION INSTRUCTIONS
ENGLISH**

Code/Name: **AWO529 DVR Enclosure /SMALL/VERTICAL
AWO529W DVR Enclosure/SMALL/VERTICAL WHITE**



IM 529

Edition: 5 from 01.03.2018
Supersedes the edition: 4 from 12.05.2017

EN

1. Application:

The enclosure protects the recorder against unauthorized access or theft. The enclosure is made of steel with a thickness of 1mm. It is equipped with lock and two tamper switches, indicating enclosure opening and detachment from the wall.

Due to the vertical installation and low depth, it is ideal for places where deeper enclosures or cabinets type Rack19" cannot be installed.


After opening the enclosure, the front cover is held in a horizontal position, providing easy access to the buttons on the front panel of DVR .

The enclosure has a special holder with retaining straps that allows for the installation of recorders of the following dimensions: Width up to 375 mm, height: up to 102 mm, depth up to 335mm.

2. Technical parameters

TECHNICAL PARAMETERS	
Dimensions:	W=435, H=500, D + D₂=121+14 [mm, +/-2]
Dimensions of the recorder compartment:	W₁=375, H₁=335, D₁=102 [mm, +/-2]
Net / Gross weight:	8,20 / 8,90 [kg]
Operation conditions:	2nd environmental class, -10°C ÷ 40°C
Finish:	AWO529 - DC01 sheet, thickness: 1mm, color: RAL9005 (black matt) - corrosion protection AWO529W - DC01 sheet, thickness: 1mm, color: RAL9003 (white) - corrosion protection
Antisabotage protection:	2 x microswitch: opening and detachment of the enclosure, 0,5A@50V/DC max. NC- normally closed contacts
Locking:	Lock MR008 (different code)
Application:	Indoor
Declarations, warranty:	RoHS
Notes:	Distance from the wall 14mm

3. Installation example:

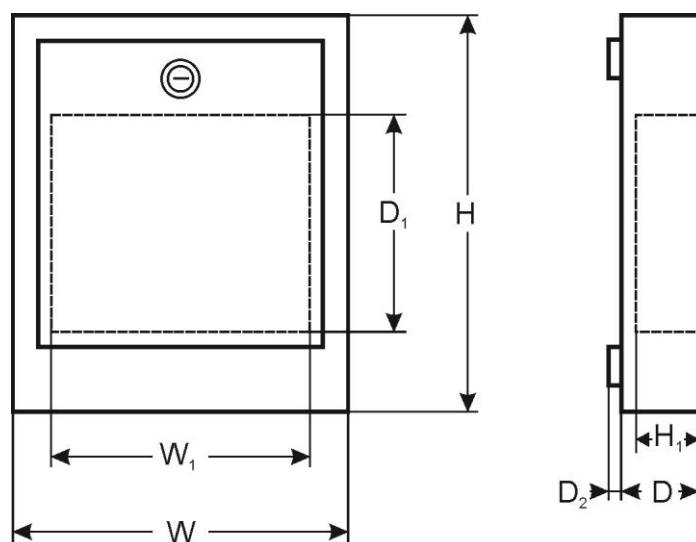

PRODUCER

Pulsar

Siedlec 150, 32-744 Łapczyca, Poland
Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50
e-mail: biuro@pulsar.pl, sales@pulsar.pl
http:// www.pulsar.pl, www.zasilacze.pl