


CODE: **AWO004** v1.5  
 NAME: **7/TRZ20/SATEL/SP**

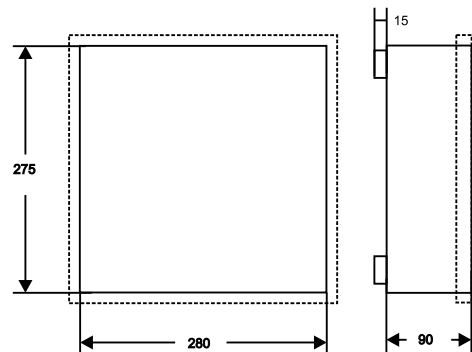

## DESTINATION

### SATEL:

CONTROL PANELS: 1) CA 4V1, CA5, CA6, VERSA 5,10, INTEGRA 24

MODULES: 1) CA64 ( PP, EPS, ADR, O- R, O- ROC, O- OC, OPS- OC, OPS-R, OPS- ROC, VGM- 16, SR, PTSA, ACC- KP- PS)

## TECHNICAL DATA

<b>Dimensions:</b>	<b>internal:</b> W=280, H=275, D=90 <b>external:</b> W1=285, H1=280, D1=105 [mm, +/-2]
<b>Weight net/gross:</b>	3,30 / 3,50 [kg]
<b>Battery space:</b>	7Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	TRZ 20VA/16V/18V
<b>Power supply:</b>	230V/AC (-15%/+10%), 50Hz, 120mA (max.)
<b>Power supply output:</b>	U1=16V/AC U2=18V/AC (-5%, +15%), I1=1,2A I2=1,0A (max.)
<b>Operating environment:</b>	class II , -10°C÷ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	2 x microswitch: opening or removal from wall, 0,5A@50V/DC max. NC/NO contacts
<b>Closing:</b>	screwed x 2, (screwed for front casing)
<b>Notes:</b>	distance from wall (mounting surface) - 15mm, easy door removal
<b>Certification, declaration:</b>	CE, RoHS, CLC/TS 50131-3:2003