


1. Intended use:

The RACK 19" cabinet enables integrating CCTV, AC, I&HAS, RTV, LAN, or other systems in small companies or households. It is intended for devices manufactured in enclosures of the 19" standard. Due to the RACK cabinets, the devices are aesthetically mounted and protected against mechanical damage.

2. Specifications:

SPECIFICATIONS	
Mounting dimensions:	W=19", H=6U
External dimensions:	W=560, H=368, D=450 [mm, +/-2]
Net/gross weight:	14,5 / 16,1 [kg]
Materials:	<ul style="list-style-type: none"> - RACK mounting rails: cold-rolled steel SPCC 1,5mm RAL 9004 - bolted - front door: 5mm toughened glass / SPCC 1,2mm RAL 9004 – hinged - side panels: cold-rolled steel SPCC 0,8mm RAL 9004 - removable
Static load:	60 kg
Use:	inside, IP20
Notes:	<ul style="list-style-type: none"> - ventilation holes in the top and bottom panel - cable ducts in the top and bottom panel - wall-mounting - 4 bolts (not included) - lockable front door (2 keys included) - ready-to-assemble
Certificates, declarations:	RoHS

3. Structure of the cabinet.

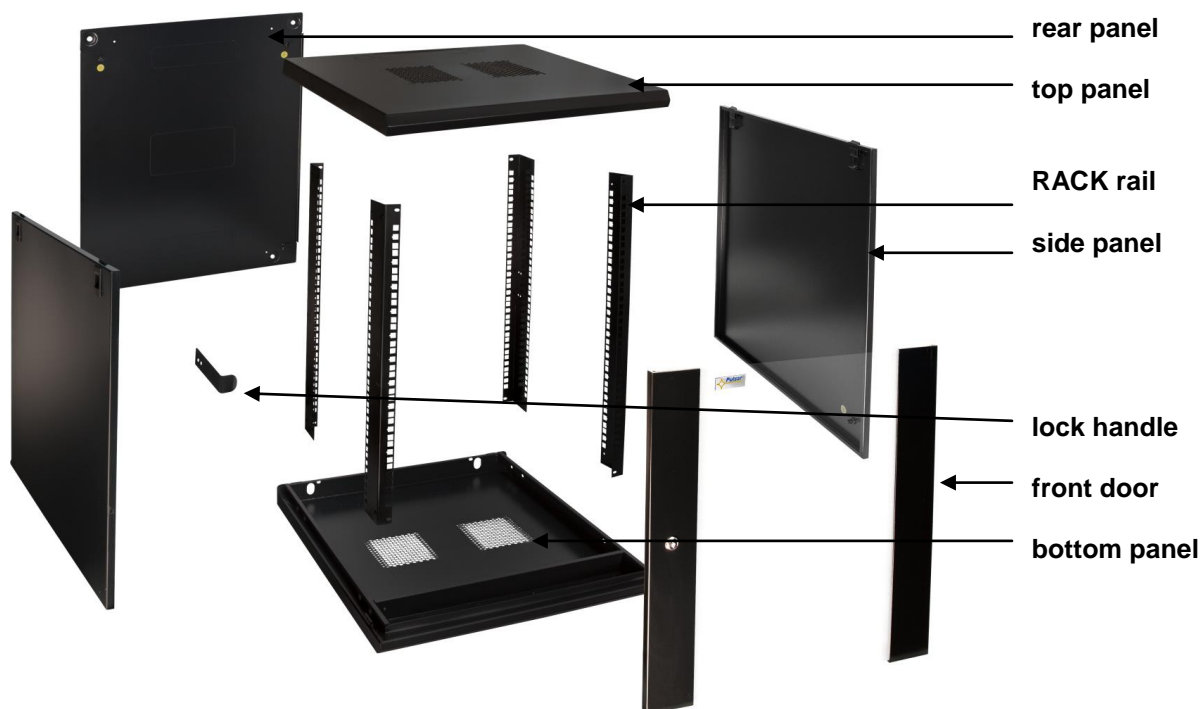

4. Assembling instructions:

The wall mounted, ready-to-assemble RACK cabinet is delivered in 2 separate packages.

4.1) Lay the **bottom panel** of the RACK cabinet (package 1/2).

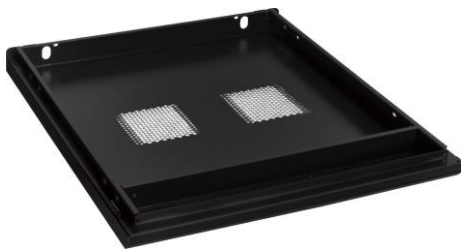


Fig.1

4.2) Bolt 4 **RACK rails** (package 2/2) to the **bottom panel**, as shown in the Fig.2.



Fig.2

4.3) Place the **top panel** onto the **RACK rails** and bolt accordingly to the figure below.



Fig.3

4.4) Bolt the **lock handle** to the front-left **RACK rail**.


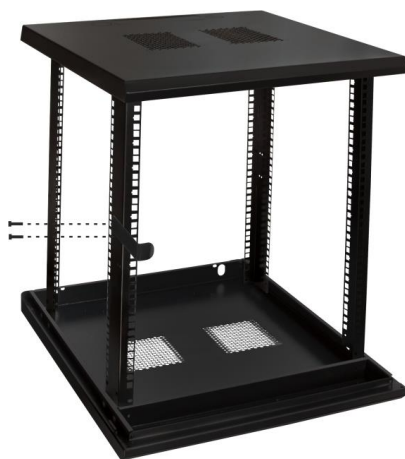


Fig.4

4.5) Mount the **front door**, **rear** and **side panels** - Fig.5



Fig.5

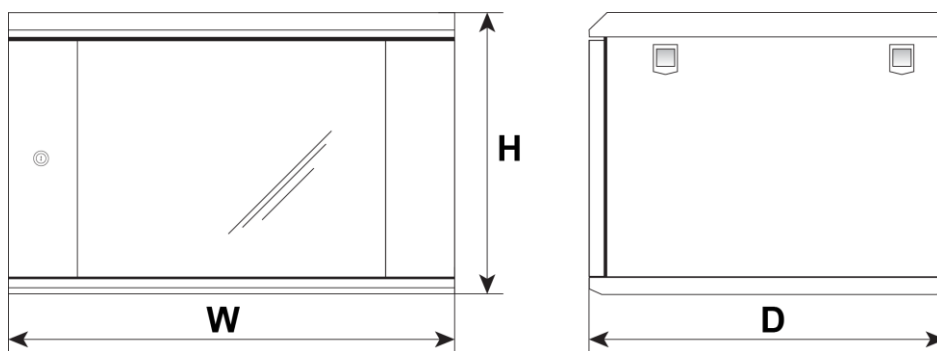

MANUFACTURER

Pulsar

Siedlec 150,

32-744 Łapczyca

Tel. 14-610-19-40, Fax. 14-610-19-50

e-mail: biuro@pulsar.pl, sales@pulsar.pl

http:// www.pulsar.pl, www.zasilacze.pl

WARRANTY

12 months from the date of purchase.

THE WARRANTY IS VALID only upon presentation of the item's proof of purchase.